
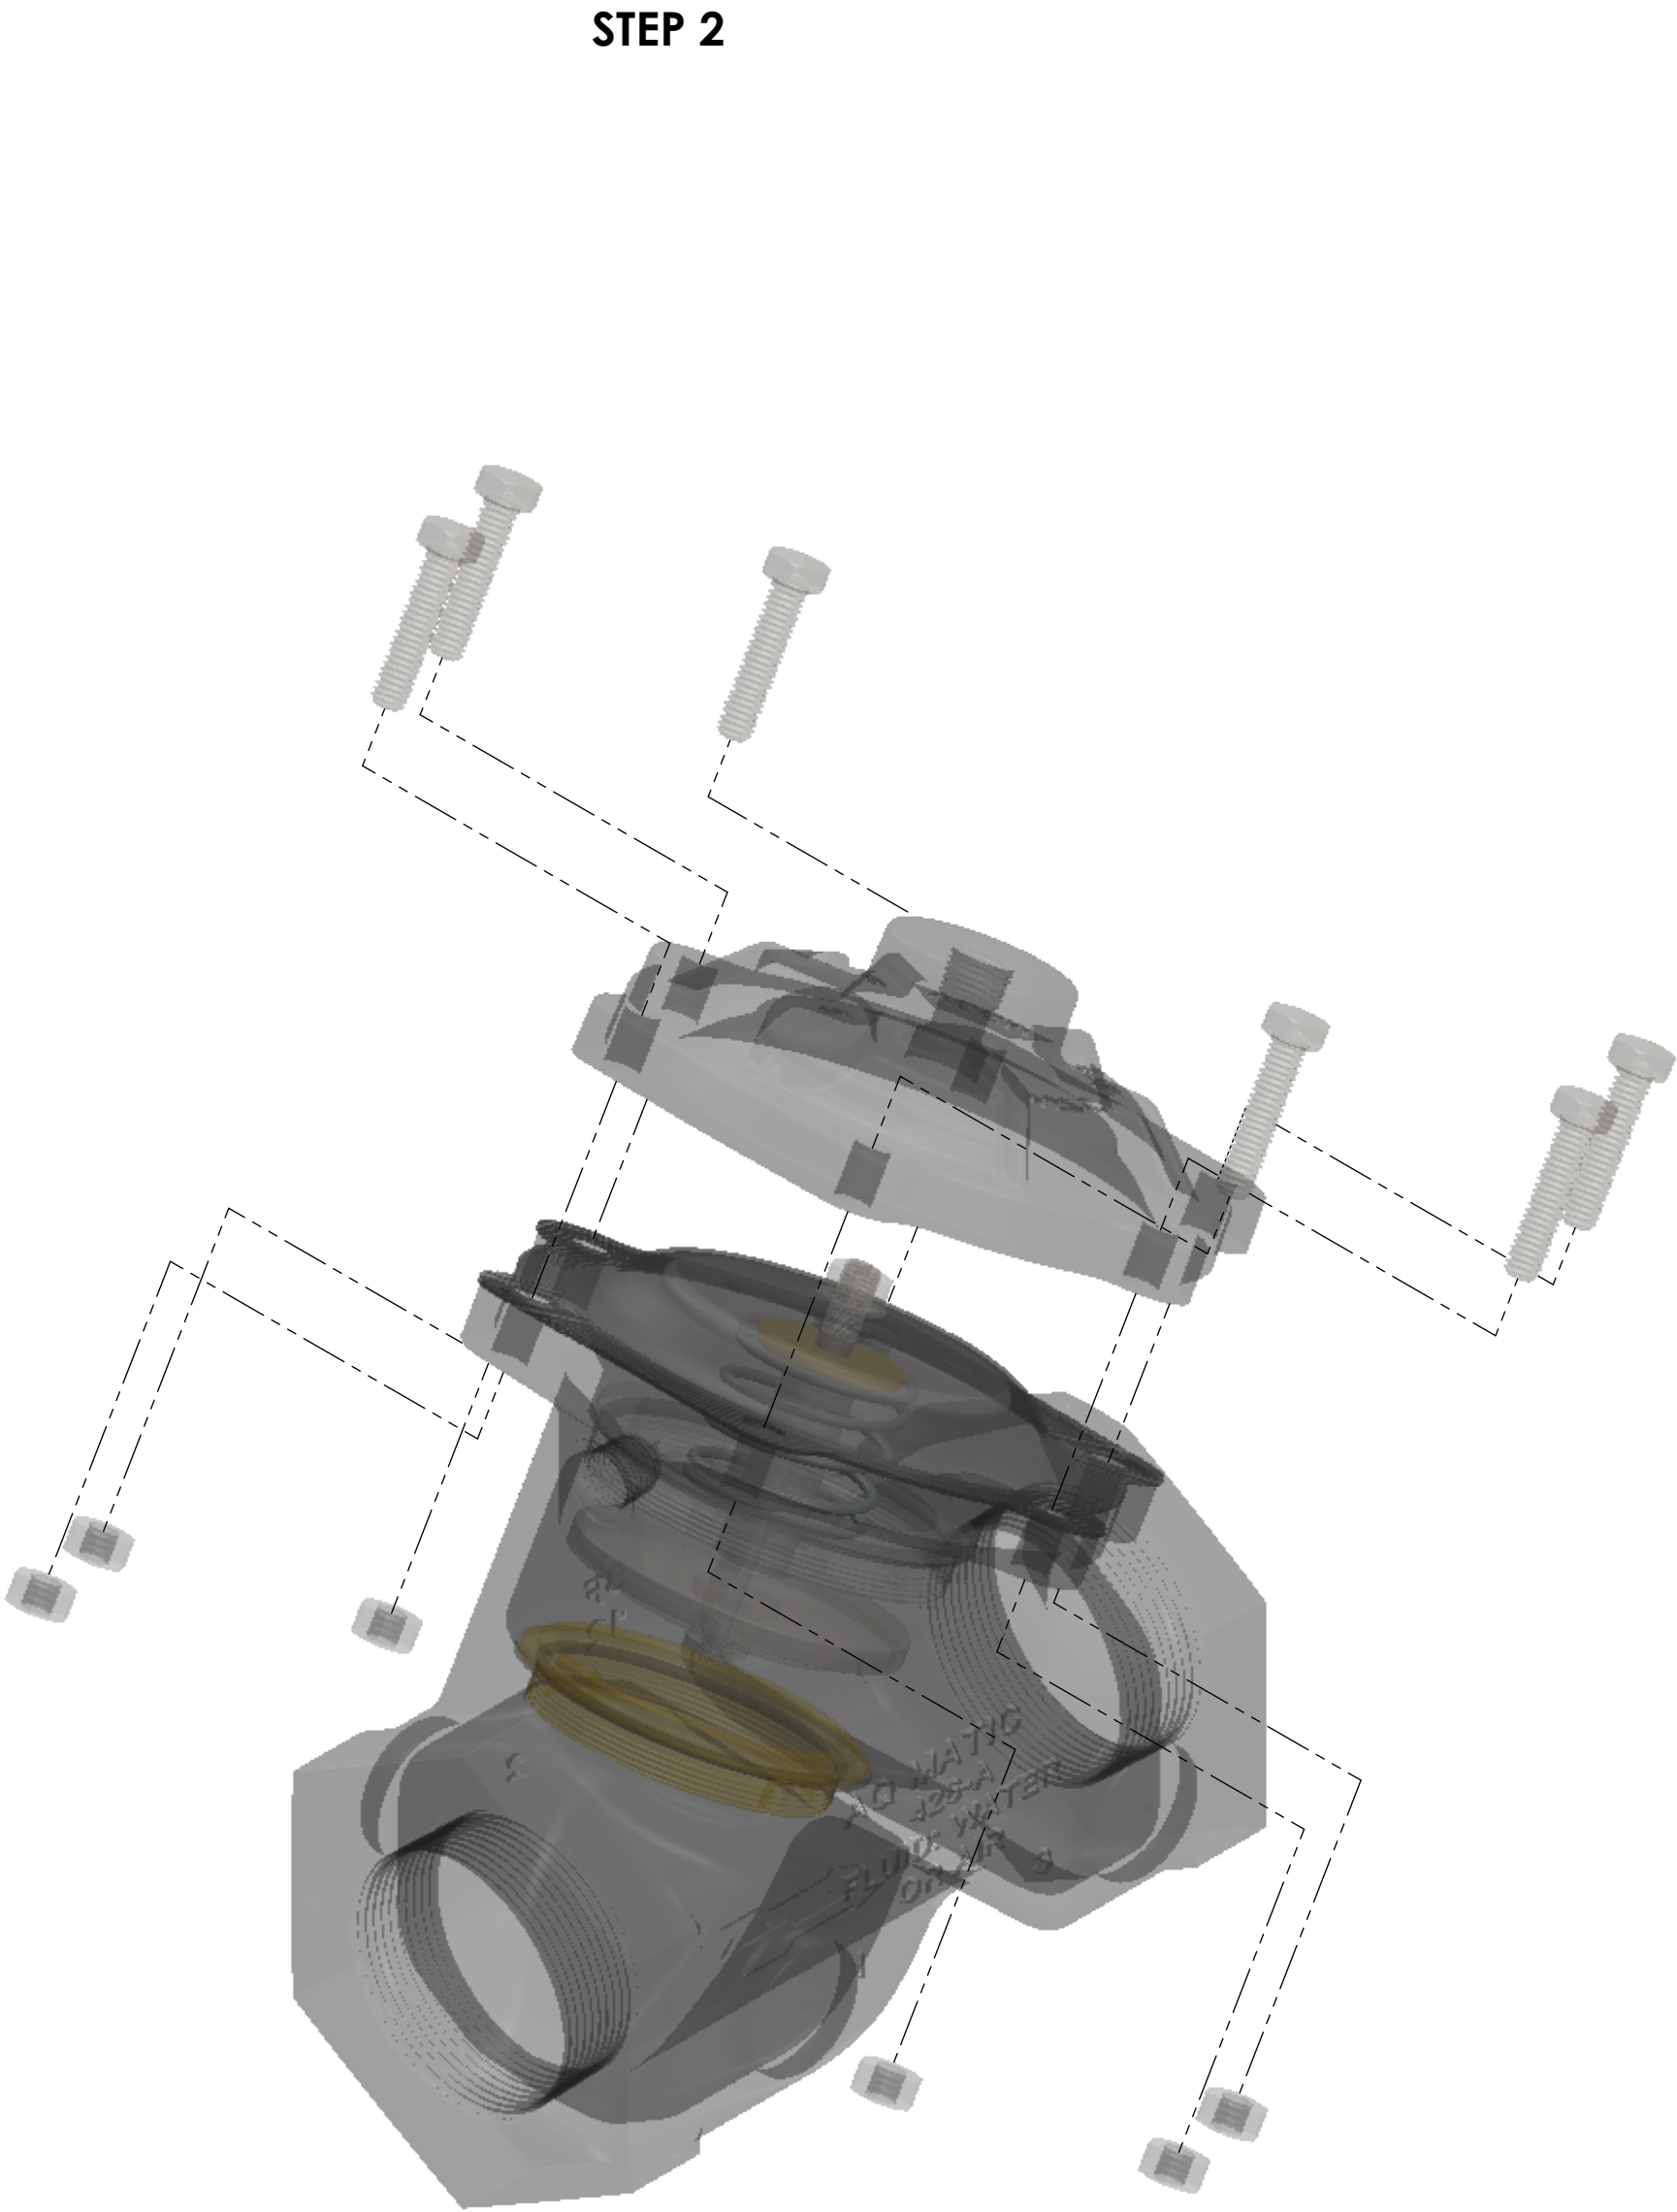


ITEM NO.	PART NO.	MODEL	DESCRIPTION	QTY.
1	1074436	426-V	CENTERING WASHER	1
2	1078692	424-SS	SPRING,COMPRESSION,302 SS	1

1070515 INTERNAL PARTS KIT
ASSEMBLY INSTRUCTION
MODEL NO. AV6-SO

REVISIONS				
ECN	REV	DESCRIPTION	DATE	APPROVED
2485	A	INITIAL RELEASE	4/8/2024	PMJ

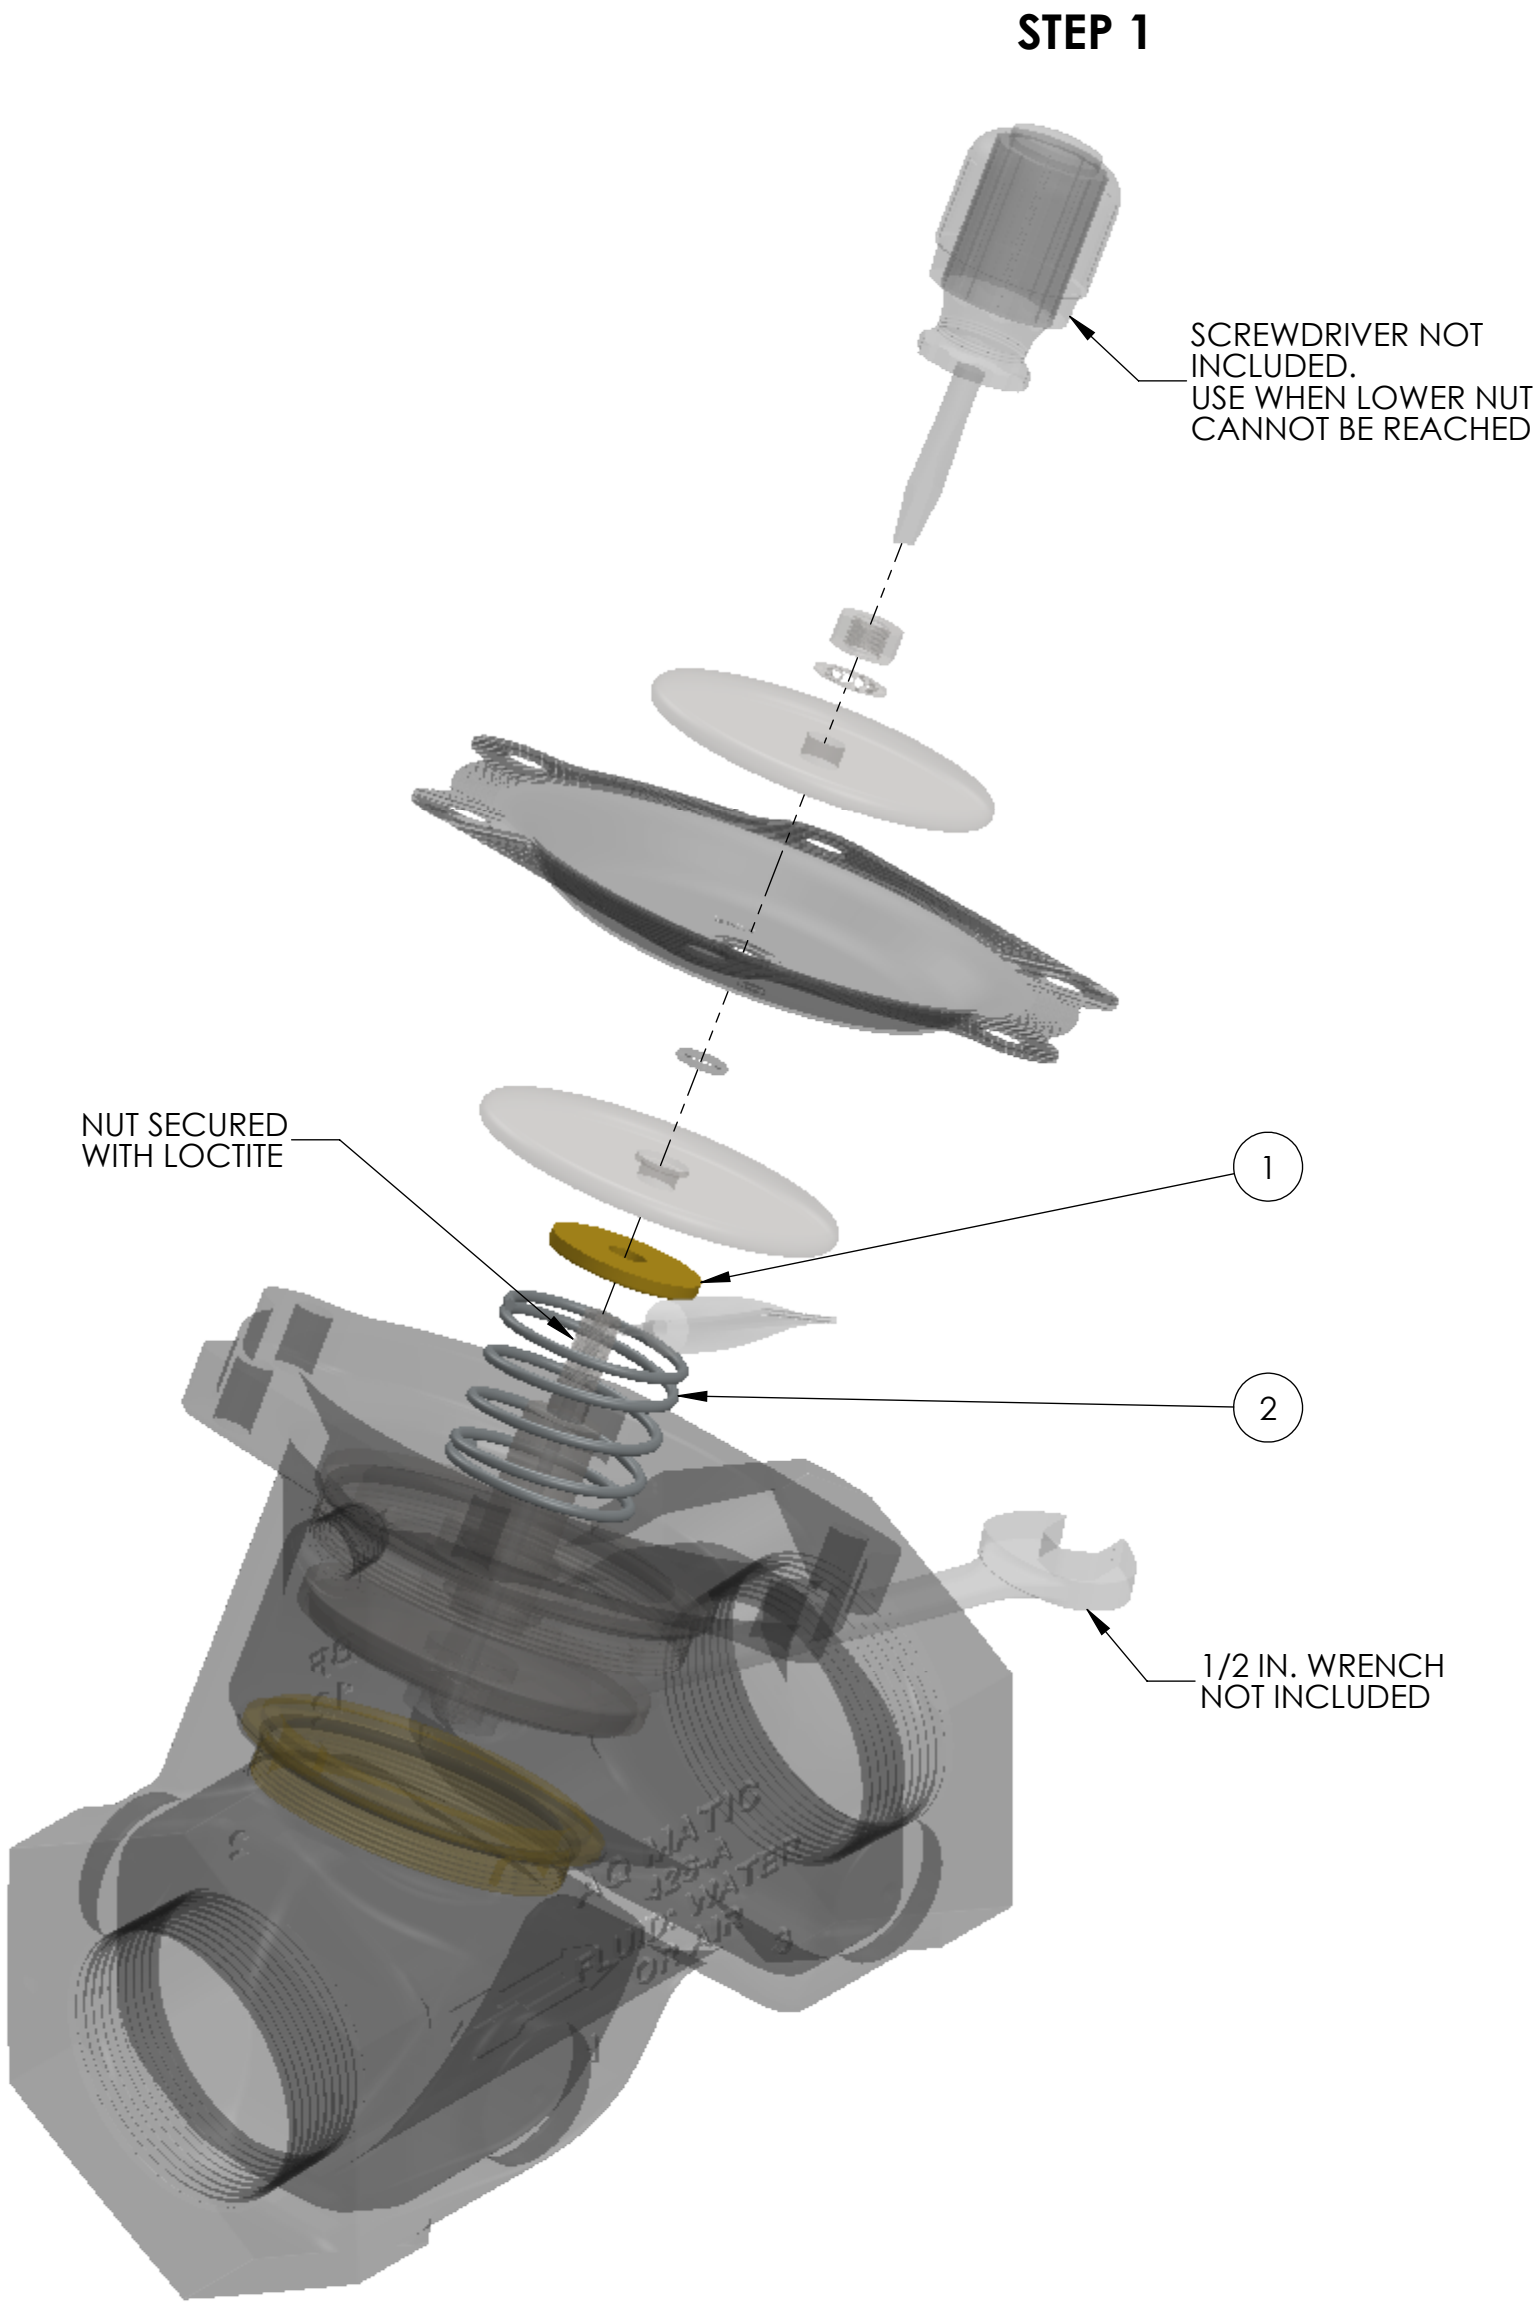

- NOTES:
- ALL O-RINGS MUST BE INSTALLED WITH 42561 SILICONE LUBRICANT.
 - ACTUAL TORQUE MAY BE WITHIN 10% OF NOMINAL VALUE IN TABLE.

TORQUE TABLE	
PART	TORQUE
SEAT	200 IN-LBS
UPPER SHAFT NUT	140 IN-LBS
LOWER SHAFT NUT	140 IN-LBS
SHAFT GUIDE	200 IN-LBS
CAP SCREWS & NUTS	140 IN-LBS

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M -2018.

PRIMARY UNITS SHOWN IN INCHES.
SECONDARY UNITS SHOWN IN MILLIMETERS.

DEFAULT TOLERANCES:
ANGLES : ± 1°
1 PLACE .X: ± .100 [2.54]
2 PLACE .XX: ± .010 [0.3]
3 PLACE .XXX: ± .005 [0.13]

THIRD ANGLE PROJECTION

THE COMPONENT OR PRODUCT DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH RoHS 3 EU (EUROPEAN UNION) DIRECTIVE 2015/863 AND EU REACH REGULATION (EC) 1907/2006.

THIS DOCUMENT IS SOLELY THE PROPERTY OF AQ-MATIC. REPRODUCTION, USE DISCLOSURE, OR TRANSMISSION OF THIS DOCUMENT OR DETAILS CONTAINED HEREIN, IN PART OR IN WHOLE, IS PROHIBITED WITHOUT THE WRITTEN CONSENT OF AQ-MATIC ENGINEERING. THIS DOCUMENT AND ANY COPIES SHALL BE RETURNED TO AQ-MATIC UPON WRITTEN REQUEST.

**AQMATIC**
Valves & Controls

DESCRIPTION

KIT,AV6,INT,SAO

DWG NO.	1070515	REV.	A
SIZE	C	SCALE	2:3
		SHEET 1 OF 1	